


NORM


GAUGE

FREE DIVE


SURFACE MODE

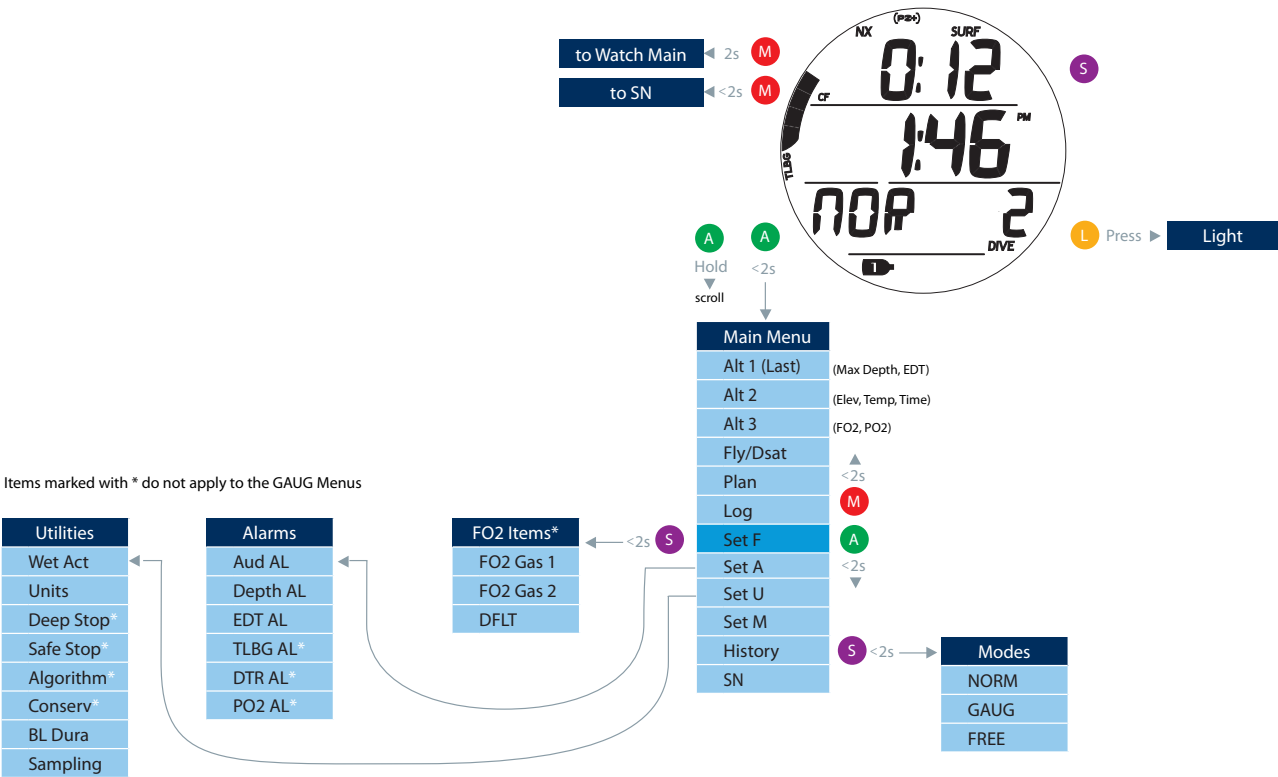

SURFACE MODE



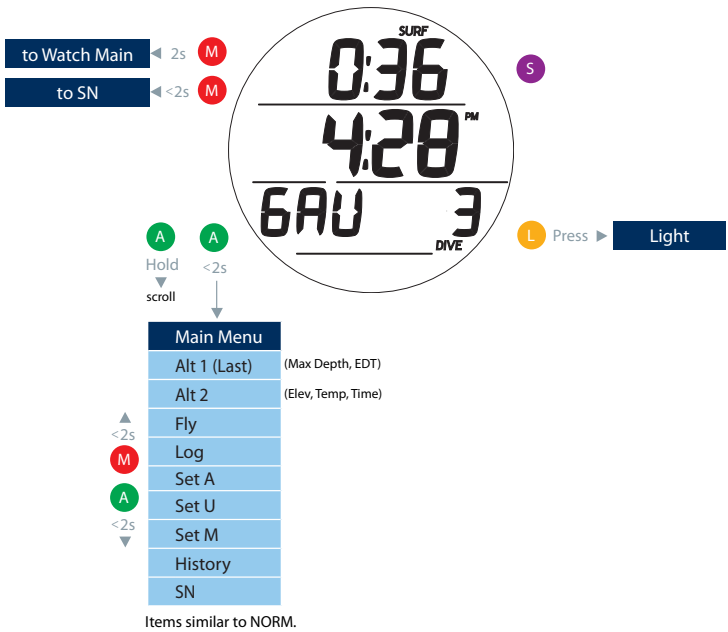


SURFACE MODE

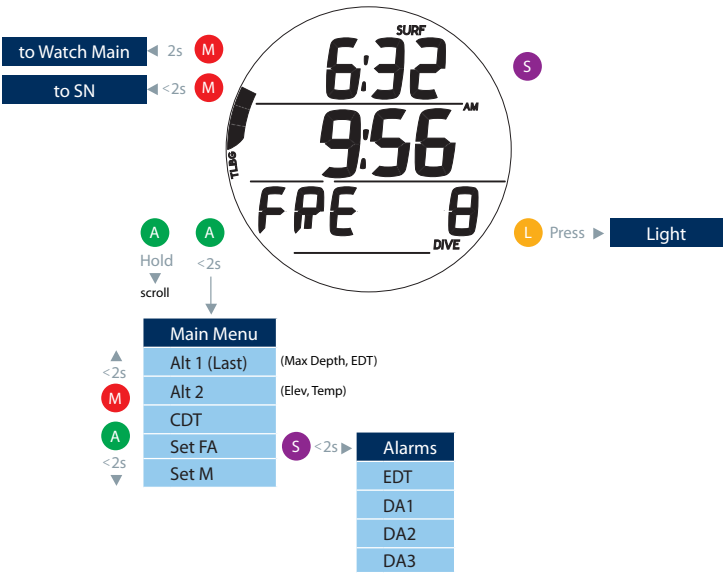


DIVE MODE

at 5 ft (1.5 M) for 5 sec ▼ at 2 ft (0.6 M) for 1 sec ▲

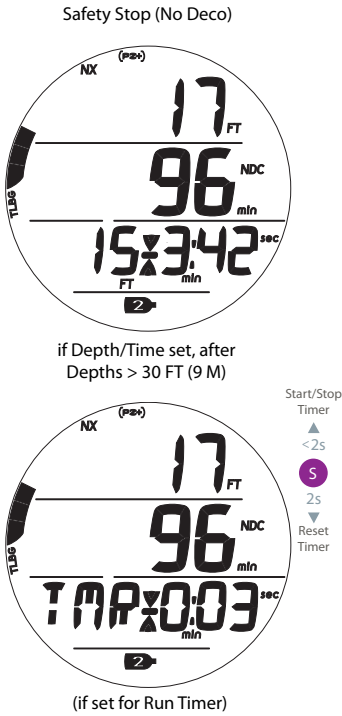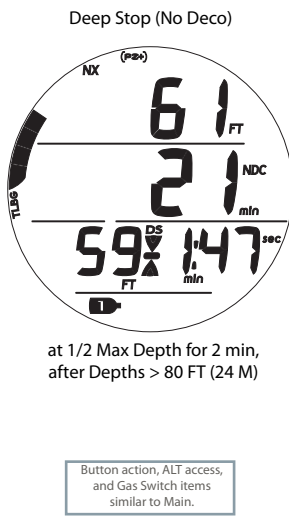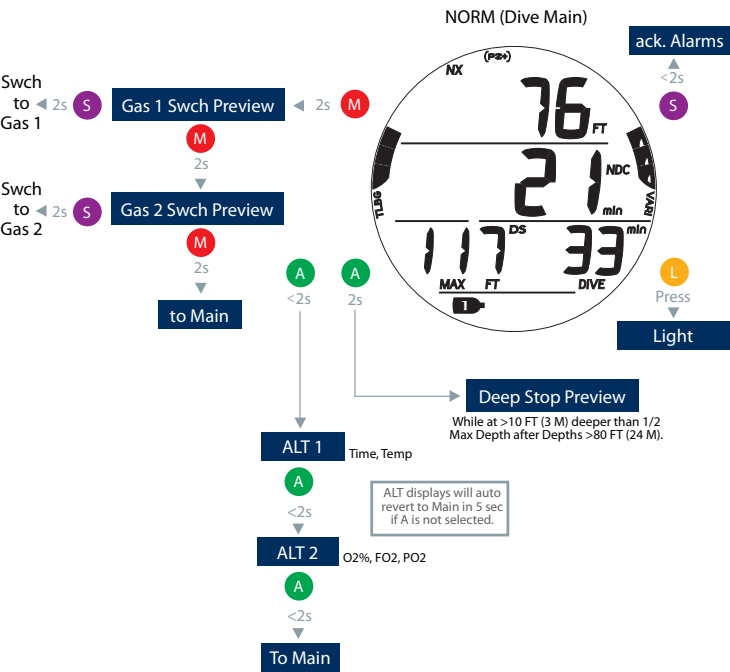


DIVE MODE


at 5 ft (1.5 M) for 5 sec ▼ at 2 ft (0.6 M) for 1 sec ▲

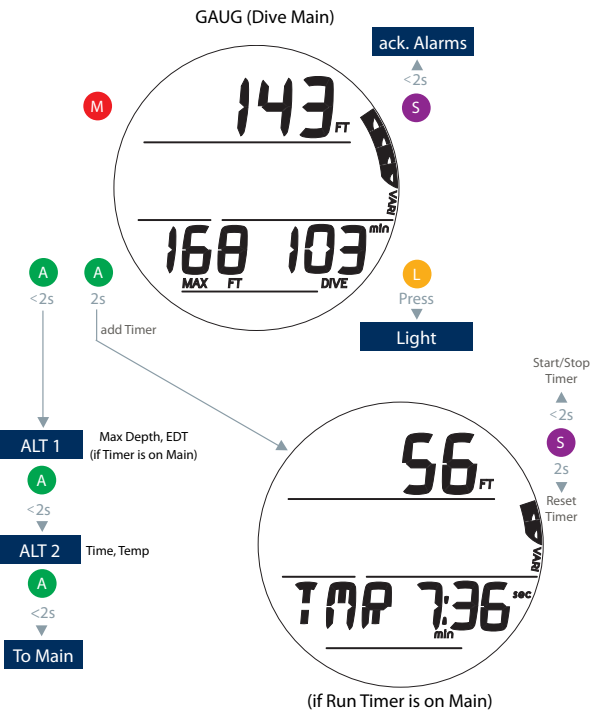


DIVE MODE

at 5 ft (1.5 M) for 5 sec ▼ at 2 ft (0.6 M) for 1 sec ▲

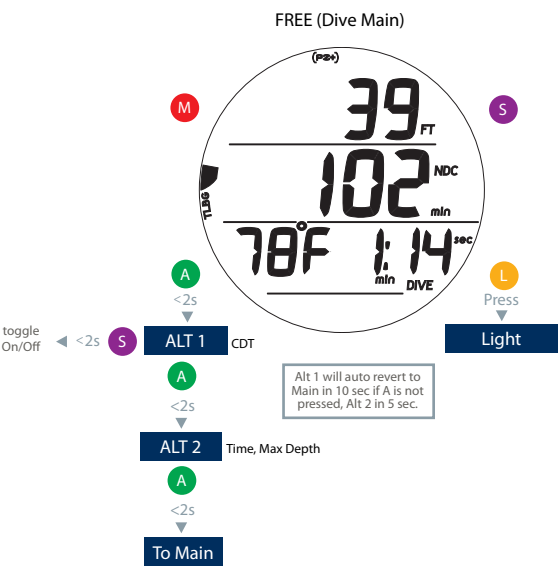

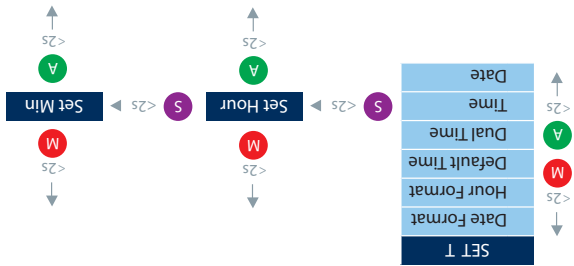

- in Menu <2s or quick press - accesses menu variable menu variable (or set point).
- in Set Routine <2s or quick press - saves or accepts
- in Menu <2s or quick press - accesses alternate displays
- in Set Routine <2s or quick press - increases the value (or set point) of variable selected.
- in Menu <2s or quick press - advances forward through menu options
- in Set Routine <2s or quick press - decreases value (or set point) of variable selected
- in Menu or Set Routine 2s - exits current display and returns to Main from any location in the data tree
- in Menu <2s or quick press - moves back through menu options
- in Set Routine <2s or quick press - decreases value
- in Menu or Set Routine 2s - exits current display and returns to Main from any location in the data tree

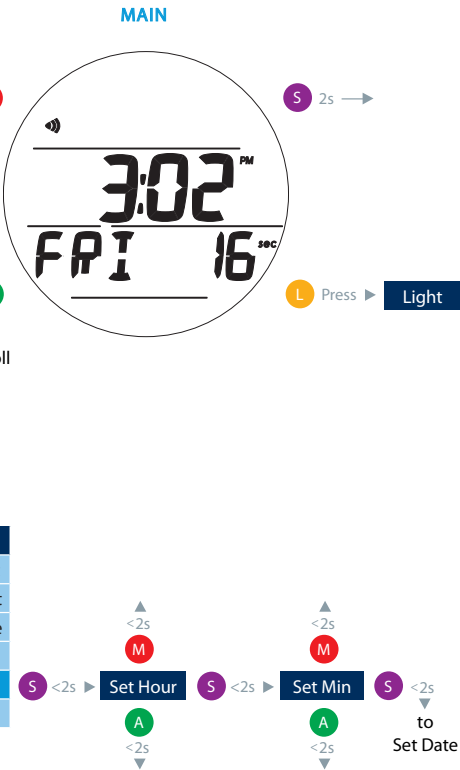

Designed by Oceanic California
2002 Davis Street
San Leandro
California, 94577
USA
800-435-3483
www.oceanicworldwide.com

ISO 9001:2000 is a distinguished global standard of quality management systems, not only in design and manufacturing, but virtually all aspects of company operations. Oceanic and its family of companies are proud of their ISO 9001:2000 certification.

In European markets, certain product categories are required to pass rigorous testing standards. All Oceanic products that require testing have surpassed the CE standards.

Oceanic products are covered by one or more United States patents. Oceanic enforces its patented technology actively and will aggressively defend any infringement.

©2002 Design All rights reserved.
Oceanic Worldwide
Doc. No. 12-5212-02 (6/14/10)

Read & Understand the Operating Manual
& Safety & Reference Manual

GEO 2 QUICK START GUIDE



OCEANLOG PC INTERFACE

(refer to Reference section of the Operating Manual and the Help section of the OceanLog program)

- Dive data (i.e.; Max Depth, EDT, Gas, status) can be downloaded from GEO 2 memory*.
- Settings (i.e.; Watch Time, Alarm, Utility, Free Mode) can be uploaded to the GEO 2, verified, or downloaded from it.
- GEO 2 firmware (operating system) can be upgraded utilizing OceanLog.

POWER SUPPLY

(refer to Reference section of the Operating Manual)


- GEO 2 - (1) 3 volt type CR2430 Lithium Battery, 560 mAHr
- Shelf Life - from factory in deep sleep, prior to initial activation - 7 years
- Use Life - 1 year (as Watch DC), 300 dive hours (as DC), if (2) 1 hour dives per dive day
- Replace the Battery prior to dive trips and vacations when multiple days of diving are planned.
- Calculations and setting retained after Battery replacement.
- Dispose of batteries according to local regulations that apply to Lithium cells.

PC REQUIREMENTS:

- IBM®, or compatible, Personal Computer with USB Port
- Intel® Pentium 200 MHz or better microprocessor
- Microsoft® Windows® 98 Second Edition, ME, NT, 2000, XP, or Vista
- Super VGA card or compatible video graphics adaptor (256 color or greater) with a minimum 800 X 600 pixel screen area of display settings
- 16MB of available RAM, 20MB of available hard drive storage
- Mouse, CD-Rom drive, Printer

- Operating Temperature (in air) - 20 to 140 F (- 6 to 60 C)
 - Operating Temperature (in water) - 28 to 95 F (- 2 to 35 C)
 - Altitude Adjustments (of N₂O₂ calculations & depth calibration) - begin at 3,001 feet (916 meters) elevation, continues up to max operating elevation of 14,000 feet (4,270 meters).
 - Repetitive Dive - NORM (or GAUG) after 10 minute post dive S₁, FREE after 1 minute post dive S₁.
 - Dive Mode - entered at 5 FT (1.5 M) for 5 seconds, exit upon ascent to 2 FT (0.6 M)
 - Time Accuracy - - +/- 1 second per day
 - Depth Accuracy - - +/- 1% full scale
 - Max Operating Depth = 330 FT (100 M) (refer to technical data section of the Operating Manual)
 - Replace the Battery prior to dive trips and vacations when multiples days of diving are planned.
 - Authorized Oceanic Dealer for inspection. Annually >> take the GEO 2 to an activities in salt water.
 - Rinse thoroughly with fresh water after
- (refer to Reference section of the Operating Manual)
- ### MAINTENANCE
- Depress S and A for 3 seconds until the display comes full On displaying the Watch Main Time screen, then release them.
- ### INITIAL ACTIVATION FROM DEEP SLEEP

- <2s means quick press/release
 - 2s means press/hold 2 seconds
 - Exit means escape (abort)
- ### INCLUDED IN THE PACKAGE:
- GEO 2, CR2430 Battery installed
 - CD (Operating Manual, OceanLog PC Interface Program and drivers
 - Review Card
- ### INCLUDED OR AVAILABLE AS OPTIONS:
- Lens Cover
 - Wrist Strap Extender



EU (EUROPEAN UNION) DIRECTIVES

- The GEO 2 is in compliance with the essential safety requirements of EU EMC directive 89/336/EEC and PPE directive 89/686/EEC.
- EU standards conformity certified by SGS United Kingdom Ltd, Weston - super - Mare, BS22 6WA, UK, Notified Body No. 0120.
- The GEO 2 is designed to comply with EN13319:2000 Diving accessories - Depth gauges and combined depth and time measurement devices - Functional and safety requirements, test methods. Any information on decompression obligation displayed by equipment covered by this standard is explicitly excluded from its scope.